

PERFORMANCE ANALYSIS OF WIRELESS NETWORK BASED ON SINGLE RF USING MIMO-OFDM WITH CONVOLUTION ENCODER AND PATE

Ranju Kumari¹, SVCST, Bhopal, India; Dharmendraa Kumar Singh², SVCST, Bhopal, India;

Abstract: - Digital communications in wireless networks are expected to support new services with tight necessities on information rates, latency and responsibility. One novel feature is that the ability to serve a dense crowd of devices, line of work for radically new ways that of accessing the network. This can be the case in machine-type communications, however additionally in urban environments and hotspots. In those use cases, the high number of devices and the relatively short channel coherence interval do not allow per-device allocation of orthogonal pilot sequences. The major problem of MIMO-OFDM is high PAPR which leads to reduction in Signal to Quantization Noise Ratio of the converters which also degrades the efficiency of power amplifier at transmitter. The large number of antenna in MIMO system resulted in power being consumed increasingly large. The antenna system with Single Radio Frequency energy that can streamline lower cost. The combination of MIMO-OFDM based single RF produces modern technology for the development of telecommunications. Our Proposed Advanced Turbo Encode using Single RF and our proposed technique effective and improve more or higher data rate transmission data and provides strongly built and reliability in wireless communication.

Keywords:— *Digital Communication, MIMO-OFDM, Single RF, Modulation, SIC, Pilot Allocation, Wireless Network, Channel AWGN.*

I. INTRODUCTION

A typical digital communication system showing, in figure 1, how a communications signal is transmitted from an information source, through a transmitter, through a channel, into a receiver, and to a final destination [1].

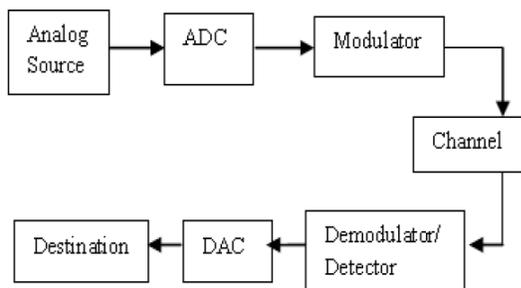


Figure 1: A typical digital communication system.

Due to ever-increasing demand of bandwidth in the future wire-less services, the radio frequency band is more and more in demand. The major requirements of the communication systems are.

- To have a better coverage
- To have better quality
- To be more bandwidth efficient
- To deploy in diverse environment

Multicarrier Modulation schemes divide the input data into bands upon which modulation is performed and multiplexed into the channel at different carrier frequencies so that information is transmitted on each of the sub carriers, such that the sub channels are nearly distortion less. Wireless communications is one of the most successful technologies in modern years, given that an exponential growth rate in wireless traffic has been sustained for over a century. Massive multiple-input multiple-output (MIMO) is a multi-user MIMO technology where each base station (BS) is equipped with an array of M active antenna elements and utilizes these to communicate with K single-antenna terminals over the same time and frequency band. The general multi-user MIMO concept has been around for decades, but the vision of actually deploying BSs with more than a handful of service antennas are relatively new [2]. The phenomenon causes reduced multipath signal fading called fading. Fading can be removed by applying diversity techniques. One technique of diversity is space diversity with lots of transmitter and receiver antennas or multiple input multiple outputs (MIMO). The number of transmitter antennas resulting in power consumption is required to distribute very large. Antenna System based Radio Frequency (RF) power can efficiently so the effect on consumption costs charged will be lower [3]. Channel capacity can also be improved by adding some additional information (redundant information) on a row of information data, known as channel coding. One of the channel coding is the convolution code. In this paper a study is presented on MIMO-OFDM system based on a single RF receiver using SIC detector.

II. MIMO OFDM SYSTEM

A. OFDM

OFDM is a wideband wireless digital communication technique that is based on block modulation. With the wireless multimedia applications becoming more and more popular, the required bit rates are achieved due to OFDM multicarrier transmissions. Multicarrier modulation is commonly employed to combat channel distortion and improve the spectral efficiency. Multicarrier Modulation schemes divide the input data into bands upon which modulation is performed and multiplexed into the channel at different carrier frequencies so that information is transmitted on each of the sub carriers, such

that the sub channels are nearly distortion less [4]. At the OFDM transmitter end, the N-point IFFT is taken for transmitted symbols. Taking the N-point FFT of the received samples, the noisy version of the transmitted symbols can be obtained in the receiver.

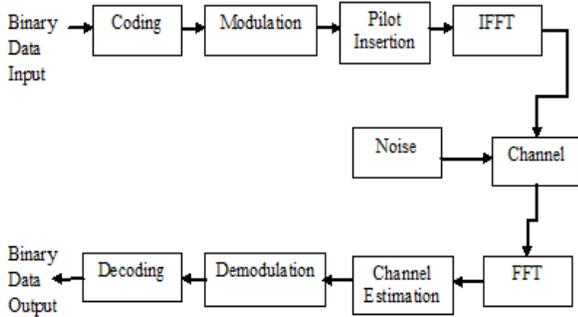


Figure 2: OFDM System

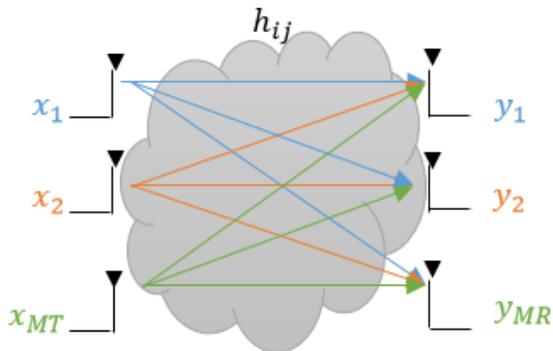


Figure 3: Illustration of MIMO Antennas

N point FFT is used to convert the signal from time to frequency domain [5]. The input data is first mapped into a modulation scheme. The complex plane data is transformed to parallel format and IFFT transform is obtained to produce OFDM signal. The output data is converted to serial format and cyclic prefix is added. Reverse operations are carried out at the receiver end. Cyclic prefix is removed and N-point FFT is taken to retrieve the transmitted data. Following equation can be used for computing FFT and IFFT:

FFT

$$X(k) = \sum_{n=0}^{N-1} x(n) e^{-j2\pi nk/N} \quad (1)$$

Where (k=0, 1... N-1)

IFFT

$$X(n) = 1/N \sum_{k=0}^{N-1} X(k) e^{j2\pi nk/N} \quad (2)$$

Where (n = 0, 1... N-1)

B. MIMO

Wireless channel that is selective fading caused Multi-path Fading channels will cause a decrease in the performance of the communication system, to resolve the issue of diversity techniques used. MIMO diversity is one technique that uses multiple antennas at the transmitter and receiver [6].

III. CONVOLUTION ENCODING SCHEMES

Convolution codes contrast from square codes by method for strategy for operation. A convolution encoder works over serial information, though piece codes works over a square of info information. Likewise unique is the usage of memory components in the convolution encoders. On account of piece codes, there is no memory component required in the era of encoded information [7]. Convolution codes are indicated as (n, k, L), where n is the quantity of yield bits from the encoder, k is the quantity of info bits to the encoder and L is the imperative length of the encoder. Unique expressions for imperative length are frequently found in various reading material yet the essential thought is same The requirement length is utilized to compute the quantity of memory stages or flip lemon utilized as a part of the encoder. For whatever length of time that we know L and the fundamental equation we can compute the quantity of memory stages (m).

$$L = k \times (m) \quad (3)$$

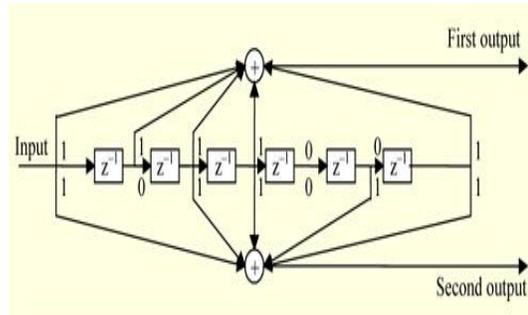


Figure 4: Convolutional Encoder Structure

IV. MODULATION SCHEMES

In digital modulation techniques, an analog carrier signal is modulated by a binary code. The digital modulator device acts an interface between the transmitter and the channel. The digital modulation schemes can be categorized basically either on the basis of their detection characteristics or in terms of their bandwidth compaction characteristics. Modulation methods which are capable of transmitting more bits per symbol are more immune to error caused by noise and interference induced in the channel. The delay distortion can be an important measure while deciding modulation scheme for digital radio [4-7]. Modulation is the process by which a carrier wave

is able to carry the message or digital signal (series of ones and zeroes). There are three basic methods to this: amplitude, frequency and phase shift keying. Higher orders of modulation allow us to encode more bits per symbol or period (time). Various modulation schemes are explained below:

A. Binary Phase Shift Keying (BPSK)

BPSK (also sometimes called PRK, phase reversal keying, or 2PSK) is the simplest form of phase shift keying (PSK). It uses two phases which are separated by 180° and so can also be termed 2-PSK. Phase shift keying (PSK) changes the phase of the carrier in step with the digital message. For binary phase shift keying (BPSK), each symbol could indicate two different states or one bit per symbol (in other words, 0 = 0, 180 = 1). It is, however, only able to modulate at 1 bit/symbol and so is unsuitable for high data-rate applications [9-12].

B. Quadrature Phase Shift Keying (QPSK)

QPSK is a form of Phase Shift Keying in which two bits are modulated at once, selecting one of four possible carrier phase shifts (0, 90, 180, or 270 degrees), as shown in figure 4. QPSK allows the signal to carry twice as much information as ordinary PSK using the same bandwidth. QPSK adds two more phases: 90 and 270 degrees. Now two symbols per bit can be transmitted [8, 15, 16]. Each symbol's phase is compared relative to the previous symbol; so, if there is no phase shift (0 degrees), the bits "00" are represented. If there is a phase shift of 180 degrees, the bits "11" are represented.

C. M-QAM modulation

Quadrature Amplitude Modulation or QAM is a form of modulation which is widely used for modulating data signals onto a carrier used for radio communications. It is widely used because it offers advantages over other forms of data modulation such as PSK, although many forms of data modulation operate alongside each other. Quadrature Amplitude Modulation, QAM is a signal in which two carriers shifted in phase by 90 degrees are modulated and the resultant output consists of both amplitude and phase variations. In view of the fact that both amplitude and phase variations are present it may also be considered as a mixture of amplitude and phase modulation.

V. WIRELESS TRANSMISSION CHANNELS

Signals in a digital communication system must get from transmitter to receiver via a transmission channel. A channel is therefore some kind of a physical medium that connects the transmitter and receiver. For analytical purposes, it is sometimes convenient to model the transmission channel as noiseless which means that the signal received is only the signal that was sent, nothing more and nothing less [13]. However, communication

channels introduce noise, fading, interference, and other distortions into the signals that they transmit. Simulating a communication system involves modeling a channel based on mathematical descriptions of the channel. Different transmission media have different properties and are therefore modeled differently.

A. Additive White Gaussian Noise (AWGN) channel

The noise analysis of communication systems is often based on an idealized noise process called additive white Gaussian noise (AWGN). In this type of channel, the noise distorting our signal is a wide sense stationary random process that is independent of frequency. The word Gaussian in the phrase additive white Gaussian noise is due to a Gaussian distribution of the amplitude of the noise (i.e., it has a normal "bell curve" distribution). AWGN leads to simple, tractable mathematical models useful for gaining insight into the underlying behavior of a system.

B. Fading Channels

When dealing with satellite and other communications systems where there is line of sight between the transmitter and receiver, the free-space propagation model gives simple theoretical explanations for propagation loss. However, with ground communications many obstructions can interfere with the transmission of a signal. Objects like mountains, buildings, densely wooded areas and rough terrain cause the signal to be reflected (i.e., bouncing off) and diffracted (i.e., bending around) these various surfaces in order to arrive at its destination [14]. These obstacles cause signals to scatter and these delayed versions to arrive at slightly different times. This phenomenon is known as multipath propagation and causes a phenomenon in real-world communications known as fading.

VI. SINGLE RF ANTENNA IN MIMO OFDM SYSTEM

Single RF signal processing on blocks composed of non phase-shifting elements and shifting elements, which ended with a variable capacitor. When a non phase-shifting elements and shifting elements coupled electromagnetic, output from the RF signal processing is the sum of the signals received at each element [15]. On a single RF antenna there are two components, namely the parasitic components and parts radiator. Radiator components must pass first phase shifter. It aims to shift or add to the phase of the transmitted signal to the antenna radiation pattern can be changed electronically without having to change its position. The output of the RF signal processing is formulated [2].

$$v(t) = \alpha v_d(t) + \beta e^{\frac{j2\pi t}{T_s}} v_p(t) \quad (4)$$

$v_d(t)$ and $v_p(t)$ are the received signals in accordance with a non phase-shifting element and phase shifting.

VII. CHANNEL ESTIMATION

Channel Estimation is required to determine the characteristics of a channel based on the sequence data transmitted by the transmitter. In general, channel estimation method with minimum mean square error (MMSE) is designed as in Fig 4.

$$J(\hat{H}) = E \{ ||e||^2 \} = E \{ ||H - \hat{H}||^2 \} \quad (5)$$

The aim of the MMSE estimation is to get a better estimation, in this case is the selection of proper load (W). Thus, the above equation must be minimized [16].

VIII. SUCCESSIVE INTERFERENCE CANCELLATION

Algorithm Successive Interference Cancellation (SIC) receiver is usually combined with the V-BLAST receiver. This algorithm provides increased performance at a value that increases computational complexity. Instead of merging decoding signals be transmitted, nonlinear detection scheme was first detected the first line of the signal and then cancel the effects of the overall vector of the received signal. Then process the next line. Channel matrix which now has reduced the size of the MR X (MT - 1); signal vector has the size (MT-1) X 1. The same operation performed on the next line. Channel matrix is now reduced to MR X (MT - 2) and vector signal is reduced to (MT - 2) X 1, and so on. If we assume all the decisions in each layer are true then there is no error during propagation. In other words, the error rate is dominated by the weakest stream, wherein the first stream decoded by the receiver [16]. Therefore, increased performance diversity of the next layer that did not help.

IX. PERFORMANCE EVALUATION MEASURES

A. Peak-To-Average Power Ratio (PAPR)

PAPR is the ratio of the maximum power to the average power of a complex signal. OFDM signal consists of large number of independent subcarriers which may result in large PAPR when added coherently. A large PAPR is detrimental because it increases the complexity of the system and reduces the efficiency of RF power amplifier. The effect of PAPR is a serious problem in the transmitter.

B. Bit Error Rate (BER)

A bit error rate is defined as the rate at which errors occur in a transmission system. This can be directly translated into the number of errors that occur in a string of a stated number of bits.

C. Signal-to-noise ratio (SNR)

SNR is defined as the power ratio between a signal and the background noise (unwanted signal): $SNR = P_{signal} / P_{noise}$, Where, P is average power. Both signal and noise power must be measured at the same and equivalent

points in a system, and within the same system bandwidth.

X. SIMULATION TOOL

It is simulating on MATLAB-2014 and for this work we use Intel 1.4 GHz Machine and operating system window7, window-xp etc. MATLAB version 14 (R2014a) is a high-level technical compute language and interactive environment for algorithm development, data visualization, records analysis, and numeric computation Mat lab is a software program. It can be used to do very simple as well as very sophisticated tasks. Database, analysis, visualization, and algorithm development. You can perform efficient data retrieve enhancement. Many functions in the toolbox are multithreaded to take benefit of multi-core and multiprocessor computers. An additional package, Simulink, neutrals network.

XI.RESULTS ANALYSIS

Table1 Proposed Works is done by Simulating Circumstances.

Digital modulation	nQAM
Channel	AWGN
Interleaver size	[N* M], where N=6,M=12
Dimension of simulated area	WN PHY layer
Packet size	128 bits (Frame length).
Code rate	X/Y, where X=172,,Y=122;
Transmission Network	Wireless Network (MAN)
Data Transmission Encoder in Network	Proposed Encoder (PATE)
Simulator Tool	MATLAB2014

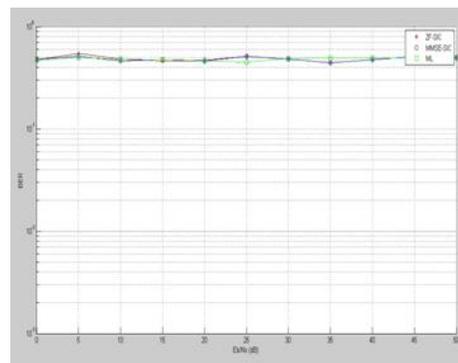


Figure 6 Performance analysis of digital wireless communication in SIC.

Experimentation on SIC: Performance analysis of digital wireless communication network based on single RF Using Average zero forcing success interfaces carrier (ZF-SIC) values 0.4841, average minimum mean square error success interfaces carrier (MMSE -SIC) values 0.4811, average maximum likelihood success interfaces carrier

(ML-SIC) values 0.4802 and finally ML-SIC is best solution based on less inaccuracy values.

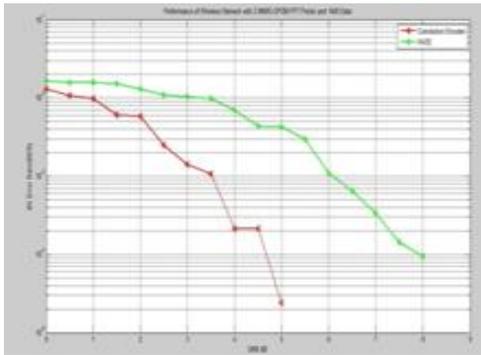


Figure7 Performance analysis FFT using 2 in PATE and Convolution Encoder

XII. CONCLUSION

Performance analysis of wireless network based on single RF Using MIMO-OFDM with convolution encoder and proposed advanced turbo encode (PATE). Improved performance of WIMAX system using turbo code modulation As the world move in to the future, there is a rising demand for high performance, high capacity and high bit rate wireless communication systems to integrate wide variety of communication services such as high-speed data, video and multimedia traffic as well as voice signals. MIMO-OFDM (Multi Input Multi Output - Orthogonal Frequency Division Multiplexing) will give larger data capacity and provide the standard of high-speed data in real time on a more robust multipath fading channel. This in turn improves the BER performance of the system and better SNR performance is achieved with higher FFT size. The key contribution is the implementation of WIMAX system based on PATE. IEEE 802.16 is simulated using MATLAB software. The conventional WIMAX system which is based on PATE with OFDM in AWGN channel is better data transmission. The results of simulation show that the bit error rate improved WIMAX system based on PATE.

REFERENCES

- [1]. B. G. Negash and H. Nikookar, "Wavelet Based OFDM for Wireless Channels", International Research Center for Telecommunication Transmission and Radar, Faculty of Information Technology and Systems, Delft University of Technology, 2001.
- [2]. Hara, Shinsuke and Ramjee Prasad., "Multicarrier Techniques For 4G Mobile Communications", Universal Personal Communications, 2003.
- [3]. Baig, Sobia dan Fazal-ul-Rehman, "Performance Comparison of DFT, Discrete Wavelet Packet and Wavelet Transforms, in an OFDM Transceiver for Multipath Fading Channel", IEEE, 2005.
- [4]. Oppenheim, Schafer with Buck, Discrete-Time Signal Processing, PEARSON Education, 2nd edition, 2005.
- [5]. A. Goldsmith, Wireless communications. Cambridge University Press, 2005.
- [6]. M. K. Lakshmanan and H. Nikookar, "A Review of Wavelets for Digital Wireless Communication", International Research Center for Telecommunications Transmission and Radar (IRCTR), Department of Electrical Engineering, Mathematics and Computer Science, Springer 2006.
- [7]. Siddeeq Y. Ameen and Wa'il A.H. Hadi, "Investigation of Using Turbo Code to Improve the Performance of DWT-OFDM System over Selective Fading Channel", IEEE, 2006.
- [8]. Deepak Gupta, Vipin B Vats, Kamal K. Garg, "Performance Analysis of DFT-OFDM, DCT-OFDM and DWT-OFDM Systems in AWGN Channel", International Conference on Wireless and Mobile Communications, pp.214-217, 2008.
- [9]. S. A. Broughton, K. Bryan, Discrete Fourier analysis and Wavelets, John Wiley, New Jersey, 2009.
- [10]. Haitham J. Taha and M. F. M. Salleh, "Multi-carrier Transmission Techniques for Wireless Communication Systems: A Survey", WSEAS Transactions on Communications, Issue 5, Volume 8, May 2009.
- [11]. Khaizuran Abdullah and Zahir M. Hussain, "Studies on DWT-OFDM and FFT-OFDM Systems", SMIEEE, International Conference on Communication, Computer and Power (ICCCP'09), Muscat, February, 2009.
- [12]. Ahmed Kausar, Shafaq Kausar, Hamood Rehman, dkk,"ESPAR Antenna System Designing & Simulation",IEEEDO10.1109/SIMS.2014.37,2014.
- [13]. I Gede Puja Astawa, Minoru Okada, "An RF Signal Processing Based Diversity Scheme for MIMO-OFDM System", IEICE Trans. Fundamental, vol.E95-A, No.2, Februari 2012.
- [14]. Bocquet, Wladimir, Kazunori Hayashi dan Hideaki Sakai, "On the SIC Detection with Adaptive MMSE Equalization for MIMO-OFDM Transmissions", 2013.
- [15]. Nisha Achra, GarimaMathur, Prof. R.P. Yadav," Performance Analysis of MIMO OFDM System for Different Modulation Schemes Under Various Fading Channels", International Journal of Advanced Research in Computer and Communication Engineering Vol. 2, Issue 5, May2013.
- [16]. Oktavia Kartika Sari, I Gede Puja Astawa, Anang Budikarso, Performance Analysis of MIMO-OFDM Systems with SIC Detection based on Single-RF with Convolution Code", IEEE, 2016.