

# A SURVEY OF MULTIHOP ROUTING IN WIRELESS NETWORKS

Dr.M.BalaGanesh, Associate Professor ,Sembodai Rukmani Varetharajan Engibeering College ,Nagapattinam ,India  
T.Madhurandhagam,PG Scholar , Sembodai Rukmani Varetharajan Engibeering College ,Nagapattinam ,India

## Abstract

The use of cooperative transmissions in multipath wireless networks is achieving Virtual Multiple Input Single Output (VMISO) links. The physical layer benefits translate into network level performance improvements. The improvements are nontrivial but rely on two crucial algorithmic decisions: the number of cooperating transmitters for each link and the cooperation strategy used by the transmitters. The system explore the tradeoffs in making routing decisions using analytical models and derives the key routing considerations. Finally, present an adaptive diversity routing protocol that includes algorithmic solutions to the above two decision problems and leverages VMISO links in multihop wireless network to achieve performance improvement. The objective of the paper is to create taxonomy of the multihop routing in wireless networks and to survey and compare representative example for each work.

Intex terms: diversity routing, cooperative transmission

## Introduction

A mobile ad hoc network (MANET) is a self configuring network consisting of mobile hosts equipped with wireless communication devices. The transmission of a mobile host is received by all hosts within its transmission range due to the broadcast nature of wireless communication and Omni directional antennae. If two wireless hosts are out of their transmission ranges in the ad hoc networks, other mobile hosts located between them can forward their messages, which effectively build connected networks among the mobile hosts in the deployed area. Due to the mobility of wireless hosts, each host needs to be equipped with the capability of an autonomous system, or a routing function without any statically established infrastructure or centralized administration. The mobile hosts can move arbitrarily and can be turned on or off without notifying other hosts. The mobility and autonomy introduces a dynamic topology of the networks.

A (MANET) is a system of wireless mobile nodes that dynamically self organize in arbitrary and temporary network topologies. People and vehicles can thus be internetworked in areas without a pre existing communication infrastructure or when the use of such infrastructure requires wireless extension. In the mobile ad hoc network, nodes can directly communicate with all the other nodes within their radio ranges whereas nodes that not in the direct communication range use intermediate nodes to communicate with each other. In these two situations, all the nodes that have participated in the communication automatically form a wireless network, therefore this kind of wireless network can be viewed as mobile ad hoc network. The mobile ad hoc network has the following typical features is unreliability of wireless links between nodes. Because of the limited energy supply for the wireless nodes and the mobility of the nodes, the wireless links between mobile nodes in the ad hoc network are not consistent for the communication participants.

Constantly changing topology, due to the continuous motion of nodes, the topology of the mobile ad hoc network changes constantly the nodes can continuously move into and out of the radio range of the other nodes in the ad hoc network, and the routing information will be changing all the time because of the movement of the nodes. Lack of incorporation of security features in statically configured wireless routing protocol not meant for ad hoc environments. Because the topology of the ad hoc networks is changing constantly, it is necessary for each pair of adjacent nodes to incorporate in the routing issue so as to prevent some kind of potential attacks that try to make use of vulnerabilities in the statically configured routing protocol. Because of the features listed above, the mobile ad hoc networks are more prone to suffer from the malicious behaviors than the traditional wired networks. Therefore, it needs a more attention to the security issues in the mobile ad hoc networks.

## Diversity Routing Protocol

Distributed diversity routing protocol called Proteus, focus only on the route discovery step



of the routing protocol and use conventional route maintenance procedures for maintaining routes. Other components such as forwarding are similar to popular on-demand protocols such as the Dynamic Source Routing protocol (DSR) except that the source route packet also includes the cluster sizes and strategies to be used in addition to the ids of intermediate nodes. This is needed since a given node which is part of multiple flows, can use different cluster sizes to support each of the flows. The communication carried out like client-server communication by sending route request and route response. The nodes also hear pilot tones to track the number of VMISO links in vicinity. When the destination receives the route request, it transmits the Route Response (RREP) after adding the information about the vicinity. The algorithm requires estimates for the following:

1. Approximate Interference powers for every node on the path.
2. Number of flows already served by each node on the path.
3. Node degree of each node on the path.
4. Number of SISO hops in the path

In the existing system Routing failure is possible in the multi hop wireless network. Route re-computation is possible in the wireless network. it lead to routing failure in the wireless network for new route found. The network performance affected, because of array size of antenna not for routing performance of wireless network. And it does not consider the different cluster size of grouping nodes. In cooperative communication highlight and aware of routing but do not consider the varying the strategy (rate, range) or its relation with cluster size.

## Related Work

Generally in the cooperative transmission [8] the signal fading is occurred due to the variation of received signal changes in transmission path and media. Cooperative diversity algorithm based upon relays amplifying their received signals or fully decoding and repeating information. these algorithms are amplify-and-forward and de-code-and-forward, respectively. These algorithms are combat multipath fading in larger networks. An alternative approach to improving bandwidth efficiency of the algorithms based upon space-time codes that allow all relays to transmit on the same subchannel and offer spatial diversity benefits without

requiring feedback. The difference between decode-and-forward and amplify-and-forward that are repetition based. In first phase, the source broadcasts to its destination and all potential relays. During second phase, the other terminals relay to the destination either on orthogonal subchannels in the case of repetition-based or same sub channel in the case of space-time-coded. The system focus on slow fading and measure performance by outage probability to isolate the benefits of space diversity.

In distributed cooperative forwarding framework[4] in which packets are forwarded through cooperative links formed on the fly without the need for establishing a prior direct route, by the help of cooperation with randomized distributed space-time codes (RDSTC). The system propose three co-operative routing mechanisms, namely Cooperative Flooding (CF), Cooperative Forwarding within Progress Region (CFPR) and CFPR with Dual Threshold (CFPR-DT). We show that our cooperative routing schemes provide improvements in total number of hops to reach the destination, while the spatial footprint is kept at a much lower level, as compared to the schemes that employ direct transmission. it is shown that the proposed cooperative forwarding framework enables guaranteed progress of the packets towards the final destination even for sparse networks, and provides robustness against mobility and fading with substantially reduced messaging burden as compared to direct forwarding and cooperative schemes based on direct routes.

Cooperative forwarding schemes, packets are forwarded through cooperative links formed on the fly, without the need for establishing a prior route and without any relay selection, actuation process. Distributed cooperative routing framework facilitates routes that reduce the total number of hops and improve the spatial reuse of the network, while providing resilience to mobility. The CF can be used as a quick node discovery mechanism instead of conventional direct flooding. it is shown that CFPR and CFPR-DT can reduce the average number of hops to reach the destination, and reduce the spatial footprint on the network.

Variety of low complexity cooperative diversity protocols [9] that can be utilized in the network that including fixed, selection, and incremental relaying. These protocols employ different types of processing by the relay terminals, as well as different types of combining at the destination terminals. For fixed relaying, the relays decode, re-encode, and retransmit the messages. selection relaying builds upon fixed relaying by allowing transmitting terminals to select a suitable cooperative (noncooperative) action Incremental relaying improves

upon the spectral efficiency of both fixed and selection relaying by exploiting limited feedback from the destination and relaying only when needed.

Location aware cooperative routing [12] the cross layer problem of combining routing and cooperative diversity in multi hop, bandwidth constrained, networks with dedicated multiple access. Previous work in cooperative diversity nearly always assumes cooperation to be a positive. In the large scale multi hop network, cooperation must only be used selectively. The merit is achievable data rate between a source and destination at a fixed probability of outage. The enforcing multiple hops is detrimental to performance, since each extra hop requires bandwidth expansion. The performance can be significantly improved by incorporating a selective cooperative diversity scheme on a one hop link. On the other hand, the simulation results show that cooperative diversity does not improve performance over a dynamic routing protocol which searches for the optimal, non diversity, route. Including the search for cooperative nodes into the dynamic route search, however, does further increase flow rates by decreasing the average number of hops and thus decreasing the required bandwidth expansion. This paper Therefore points to the importance of an integrated approach to routing and the physical layer used in cooperative networks. The routes selection algorithm is used for transfer the information in the wireless network.

Cooperative transmissions [3] combat various fading effects in wireless communications by employing multiple antennas from different nodes to achieve spatial diversity. Virtual Multiple Input Single Output is one instance of cooperative transmissions capable of achieving higher receiving SNR, which can either extend the transmission range or increase the transmission rate. While the physical layer performance of Virtual MISO has been well studied and describes the Cooperative Source Routing (CSR) protocol to convert physical layer gain into network level performance improvement. With both route request and route reply control packets being transmitted cooperatively, CSR can explore routes with high cooperative diversity. Demonstrate CSR's performance through simulation and compare CSR with other protocols. Building SISO network topology: Each node periodically broadcasts a neighbor update message via SISO transmission. Using a process similar to distance vector routing, the neighbor update messages build up a SISO network topology (SNT), where entries in SNT represent nodes that are reachable via either single hop or multi hop SISO transmissions. CSR explores the benefit cooperative transmissions

where cooperatively transmitted RREQ and RREP can be received by nodes in other groups even when the group distance is large.

## Proposed System

Space time division multiple access is used for enhance the privacy of the wireless network. Multiple antenna array is used for enhance the privacy of wireless network. The fading of each channel varied Multiple antenna array is used for communication in the wireless network. Virtual antenna is used for communication of cooperative communication. The number of Virtual multiple input is transmitted in the wireless network to initiate the communication. Virtual multiple input is used for cooperative information with single transmission. Although VMISO allows improved data rates, the coordination overhead and complexity of channel state information and processing are significant challenges in VMIMO.

To achieve performance, number of related work have been proposed. The number cooperative transmitter leveraged at the transmitted side. The number of routing protocol is proposed in wireless communication such as dynamic source routing and distributed dynamic source routing protocol is used for transmission of information. The number of cooperative transmitter is used for increase the availability of the link. In a VMISO system, multiple transmitters transmit encoded versions of the same signal so that the error performance at the receiver is improved significantly compared to a traditional Single Input Single Output (SISO) system. The number of virtual transmitter such as diversity gain and interference tradeoff is appropriately leveraged. The cooperation strategy such as diversity gain that is used increase the range or rate of links and both. The space time block coding is used for transmit the virtual packet length  $L$  and in  $T_s$ . The space coding blocking is used for benefit of diversity of channel. In Receiver know the complex channel fading of a channel and determine the bandwidth utilization.

## Proposed Method

1) Find The Distance in Joint Throughput Multihop Manner.

In jointly optimizing for link rate and hop distance to achieve performance improvements using VMISO transmissions.

2) Determine the Cluster Size

An adaptive clustering algorithm that dynamically adjust the cluster size for each flow in the network.

### 3) Routing Strategies

The rate, range and cluster size are used to identify the best approach of joint optimization.

The figure.1 describes the VMISO which consists of multiple input, virtually create the multiple input in the side and then form the number of virtual input at the inputs and then create the virtual multiple input and then clustering the number of nodes within one group and then transfer the packet its make the link for packet transfer and finally transfer to the destination node. It make the link with quality and reduce the inference in the channel and the final information transfer to destination.

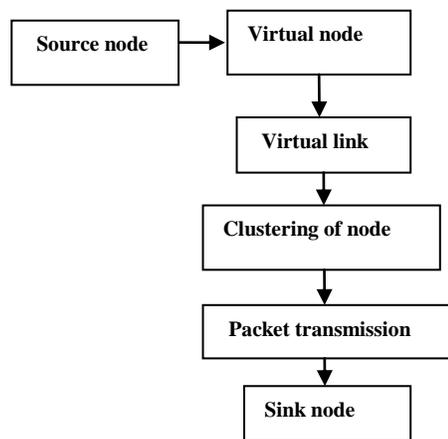


Figure.1 System Architecture

## Conclusion

Cooperative transmissions provide fundamental improvements to multi hop routing performance in wireless networks in terms of better scalability with both hop length and flows compared to existing wireless technologies. Realizing cooperative routing with multiple flows is nontrivial due to inherent tradeoffs between improving a single flow's performance and the interference among flows. Achieving the performance benefits hinges critically on two algorithmic problems: determining the right cluster size and strategy (i.e., combination of rate and range for a given SNR improvement) by appropriately modeling the tradeoffs, intelligent routing decisions can be taken in a distribut-

ed manner leading to significant performance improvements confirmed. While system was developed to optimize throughput as the metric, the proposed framework can be used to identify routing. In this paper we also done the survey of cooperative source routing, distributed cooperative forward frame work, cooperative transmission and cooperative algorithm, cooperative transmission protocols and location aware cooperative routing. The survey tries to review multihop routing and review the characteristics and tradeoffs.

## References

- [1] S.Barbarosa and Scutari,G., "Distributed Space Time Coding for Multihop Networks," Proc. IEEE Int'l Comm. Conf., 2004.
- [2] P.Gupta and P.R. Kumar,"The capacity of wireless network",IEEE Trans,Information Theory , vol 46,no.2 pp.388-404,Mar.2000
- [3] Y.Guan, Y. Xiao, C.C Shen, and L.Cimini , "Cooperative Source Routing Using Virtual MISO in Wireless Ad hoc Networks",Proc. IEEE Wireless Comm and Networking conf.(WCNC),pp.1119-1124,2011.
- [4] M.S.Gokturk,E.Erkip and O.Gurbuz,"a cooperative routing framework based randomized coding in wireless ad hoc networks,"Proc.IEEE Eighth Int'l Conf.Mobile Ad Hoc and Sensor System(MASS),pp.138-142,2011
- [5] D.Johnson,D.Maltz, and J.Broch, DSR: "The Dynamic Source Routing Protocol for Multi hop Wireless Ad Hoc Networks"Chapter 5,pp.139-172,Addison-Wesley,2001.
- [6] K.Jain, J. Padhye,V. Padmanabhan, andL. Qiu, "Impact of Interference on Multi-hop Wireless Network Performance",Proc,ACM MobiCom,Sept.2003.
- [7] M.Kurth et al,"Cooperative Opportunistic Routing Using Transmit Diversity in Wireless Networks", Proc. IEEE INFOCOM, 2008.
- [8] J.N. Laneman, and G.W. Wornell, "Distributed Space Time Coded Protocols for Exploiting Cooperative Diversity in Wireless Networks,"IEEE Trans. Information Theory, vol. 49, no. 10, pp. 2415 to 2525, Oct. 2003.
- [9] J.N.Laneman, D.N.C Tse, and G.W.Wornell,"Cooperative Diversity in Wireless Net-



works: Efficient Protocols and Outage Behavior,"IEEE Trans. Information Theory.vol. 50, no.12,pp.3062-3080,Dec.2004.

[10] S.Lakshmanan, and R. Sivakumar ,“Diversity Routing for Wireless Networks with Cooperative Transmissions,” Proc. IEEE Sixth Ann.Comm. Soc. Conf. Sensor, Mesh and Ad Hoc Comm. and Networks(SECON), June 2009.

[11] G.Wang et al ,”A MAC Layer Protocol for Wireless Networks With Asymmetric Links”,Ad Hoc Networks,vol 6,pp,424-440,2008.

[12] Y. Xiao ,Y. Guan, C.C. Shen, and L.Cimini,”Location Aware Cooperative Routing In Wireless Networks,” ”Proc.IEEEWireless comm Comm and Networking conf.(WCNC),pp.761-766,2011.

## Biographies

**Dr.M.Balaganesh** received the B.E degree from Bharathidasan university trichy, completed his Master Degree from Anna University, Chennai, India. Currently working Associate Professor in Sembodai Rukmani varatharajan Engineering college, Anna University Chennai, India. His research interest include ad hoc networks, Theory of computation, embedded system.  
(e-mail: [pmbalaganesh@rediffmail.com](mailto:pmbalaganesh@rediffmail.com))

**T.Madhurandhagam** received the **B.E.** degree in computer science engineering from the Shri angalamman College of Engineering and technology ,Trichy, Anna University Chennai, India,in 2012.Currently doing **M.E.** in Computer Science Engineering in Sembodai Rukmani varatharajan Engineering college, Anna University chennai, India. Her research interest includes network security, mobile computing and computer networks.  
(e-mail: [madhujagatha@gmail.com](mailto:madhujagatha@gmail.com))